

10/541711  
541,711

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(43) International Publication Date  
29 July 2004 (29.07.2004)

PCT

(10) International Publication Number  
**WO 2004/064323 A1**(51) International Patent Classification<sup>7</sup>: **H04L 12/24**[GB/GB]; c/o Satchwell Control Systems Limited, Inven-  
sys House, Carlisle Place, London SW1P 1BX (GB).(21) International Application Number:  
PCT/GB2003/005705(74) Agents: **MUIR, Benjamin, Michael, James et al.**; Page  
Hargrave, Southgate, Whitefriars, Lewins Mead, Bistol  
BS1 2NT (GB).(22) International Filing Date:  
29 December 2003 (29.12.2003)(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,  
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,  
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:  
0300499.1 9 January 2003 (09.01.2003) GB(71) Applicant (for all designated States except US): **SATCH-  
WELL CONTROL SYSTEMS LIMITED** [GB/GB]; In-  
vensys House, Carlisle Place, London SW1P 1BX (GB).(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HUSEIN, Sajed**

[Continued on next page]

(54) Title: BUILDING MANAGEMENT WITH REMOTE CONFIGURATION

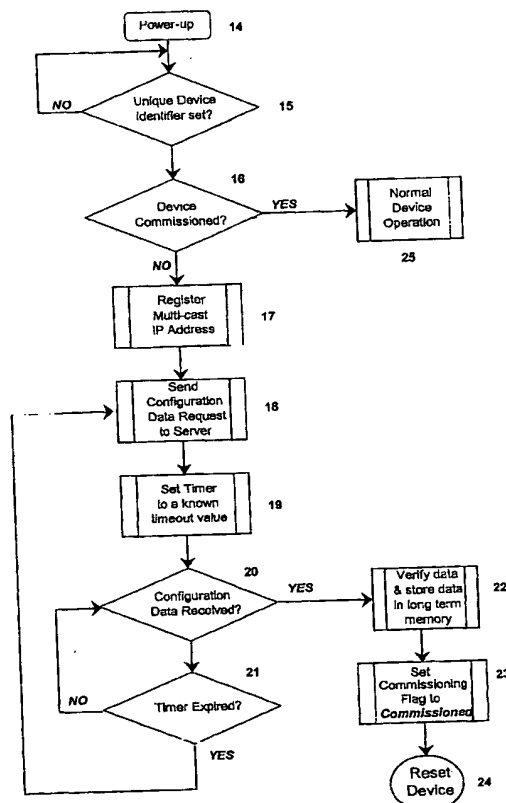

(57)-Abstract: A building management system and method for configuring the same are disclosed, the building management system comprising a front end device networked to a plurality controller devices. Each controller devices is adapted to transmit a configuration data request if not sufficiently configured to perform its appointed role and the front-end device is adapted to respond to such a configuration data request by broadcasting a configuration data response containing the required configuration data to all the controller devices. Each broadcast configuration data response further includes sufficient information to enable each controller device to determine whether to act on or ignore the broadcast configuration data response

WO 2004/064323 A1